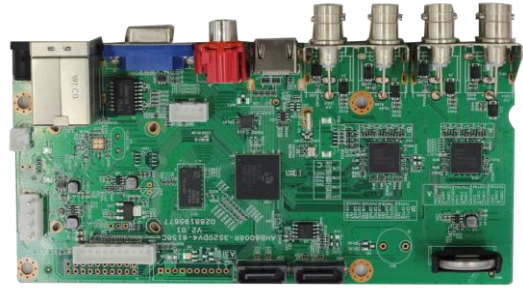# CCNETMARKET.com

AHB8008R-LM

Feature：

➢ Support H.265 encoding, ultra-low bitrates, compatible with H.264 surroundings;

➢ Support VGA, HDMI full HD output simultaneously;

➢ Support ONVIF; access third party;

➢ Support multiple cloud technology, network penetration, alarm information pushed to your phone and other functions;

➢ Support web, CMS, center platform management software MYEYE, provide SDK development;

➢ Support various mobile monitoring (iPhone, Android);

➢ Remote Access, With DNS (ARSP),easy to monitor remotely

➢ Support UTC, control signal& video stream transmit through one single coaxial

➢ Support XVI/AHD/TVI/CVI/CVBS/IP six signals;

➢ Support Digital to analog conversion、Instant playback

Specification：

	Model	AHB8008R-LM
System	Main processor	Hi3520DV400
Interface	Preview	1/4/8/9
Video	Codec	H.265
	Monitor quality	VGA(1080P at most);HDMI(1080P at most)
	Preview ability	8*1080N（6 in 1）
	Encode ability	8*1080N@15fps（6 in 1）
	Decode ability	8*1080N@15fps（6 in 1）
	Multi-mode input	Analog：8*1080N； Digital to analog conversion：support network：16*1080P；8*5M
	Motion Detection	Each screen can be set to 192 (16 * 12) detection areas; multi-level sensitivity can be set (Limited local channel)
Audio	Audio compression	G.711A
	Intercom	support
Record & playback	Record mode	manual>alarm>motion detection>timing
	Local Playback	4ch(analog input mode)
	Search mode	Search by time, calendar, event, channel
Storage & backup	Video storage	HDD, network
	Backup mode	Network, USB hard disk, USB burner, SATA burner
External Interface	Video input	8ch BNC
	Video output	1ch VGA, 1ch HDMI
	Loop Vout	N/A
	Audio I/O	1/1
	Alarm I/O	0/0
	Network interface	RJ45 10M/100M self-adaption
	PTZ control	Support kinds of PTZ protocols
	USB	2* USB 2.0 ports
	HDD	2*SATA ports (Max 8TB/per)
	Wireless	3G, WIFI (extend via USB)

General	Power supply	12V/4A
	Power Consumption	<15W (without HDD)
	Working environment	Temperature:0℃—+55℃，Humidity:10%—90%，Atm:86kpa—106kpa
	Dimension	168mm*80mm
	Weight	142g